

## Description

- Axial Leaded
- Fast Acting, Solid Matrix Construction
- High Temperature Thermoplastic Body, UL 94 VO
- Tin-lead plated copper Lead Wires, .025" diameter

ELECTRICAL CHARACTERISTICS	
% of Amp Rating (0-10A)	Opening Time
100%	4 hours minimum
250%	5 seconds maximum

## Agency Information


- UL Recognition Guide & File Numbers: JDYX2 & E19180
- CSA Certification File & Class Numbers: 053787 C 00 & 1422 30 (0 - 1/8A); 053787 C 00 & 1422 01 (1/4A - 8A)

## Ordering

- Specify product code and packaging code


## Environmental Data

- Life Test: 2000 hours at 80% rated current, 55°C
- Moisture Resistance: MIL-STD-202, Method 106, 90% relative humidity at 65°C.
- Operating Temperature: -55°C to 125°C with proper fuse derating
- Resistance to Soldering Heat: MIL-STD-202, Method 210, Test Condition C (260°C)
- Salt Spray: MIL-STD-202, Method 101, Test Condition B
- Shock: MIL-STD-202, Method 213, Test Condition I, 100G's for 6 milliseconds
- Solderability: MIL-STD-202, Method 208

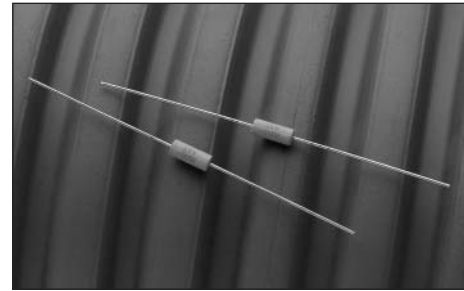

- Terminal Strength: MIL-STD-202, Method 211, Test Condition A, will withstand 7 lb. axial pull test.
- Thermal Shock: MIL-STD-202, Method 107, Test Condition B, -65°C to 125°C
- Thermal Cycle: EIA-STD-RS-186-C, Test Condition A, -55°C to 85°C
- Vibration: MIL-STD-202, Method 204, Test Condition C, (55 to 2000 HZ, 10G's peak)
- Wave Soldering: Maximum reservoir temperature 260°C, 10 second maximum exposure, .125" from body.

## Dimensions <sup>mm/(inches)</sup>

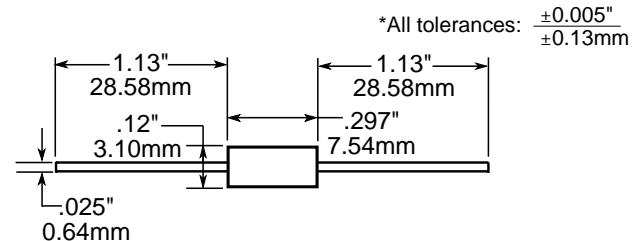


Product Code	Rated Voltage		Interrupting Rating <sup>1</sup>		Pre-arching <sup>2</sup> I <sup>2</sup> t (A <sup>2</sup> sec)		Typical Total Clearing <sup>2</sup> I <sup>2</sup> t (A <sup>2</sup> sec)		Typical Voltage Drop Volts at 100% Rated
	AC	DC	AC	DC	AC	DC	AC	DC	
	<b>MCR-1/16</b>	125V	125V	50A	300A	1.1 x 10 <sup>-6</sup>	1.0 x 10 <sup>-7</sup>	1.8 x 10 <sup>-6</sup>	
<b>MCR-1/8</b>	125V	125V	50A	300A	4.3 x 10 <sup>-6</sup>	7.1 x 10 <sup>-7</sup>	7.3 x 10 <sup>-6</sup>	8.7 x 10 <sup>-7</sup>	1.52
<b>MCR-1/4</b>	125V	125V	50A	300A	8.0 x 10 <sup>-5</sup>	1.0 x 10 <sup>-6</sup>	1.2 x 10 <sup>-4</sup>	1.3 x 10 <sup>-6</sup>	.76
<b>MCR-3/8</b>	125V	125V	50A	300A	9.7 x 10 <sup>-5</sup>	6.7 x 10 <sup>-6</sup>	1.1 x 10 <sup>-4</sup>	8.3 x 10 <sup>-6</sup>	.73
<b>MCR-1/2</b>	125V	125V	50A	300A	7.4 x 10 <sup>-4</sup>	5.4 x 10 <sup>-5</sup>	6.2 x 10 <sup>-3</sup>	6.8 x 10 <sup>-5</sup>	.65
<b>MCR-3/4</b>	125V	125V	50A	300A	1.3 x 10 <sup>-3</sup>	7.4 x 10 <sup>-5</sup>	7.5 x 10 <sup>-2</sup>	9.2 x 10 <sup>-5</sup>	.55
<b>MCR-1</b>	125V	125V	50A	300A	.01	.01	.02	.01	.24
<b>MCR-1 1/2</b>	125V	125V	50A	300A	.03	.02	.04	.03	.20
<b>MCR-2</b>	125V	125V	50A	300A	.09	.07	.11	.08	.16
<b>MCR-2 1/2</b>	125V	125V	50A	300A	.19	.14	.25	.17	.15
<b>MCR-3</b>	125V	125V	50A	300A	.35	.28	.45	.32	.15
<b>MCR-3 1/2</b>	125V	125V	50A	300A	.56	.37	.83	.43	.14
<b>MCR-4</b>	125V	125V	50A	300A	.96	.67	1.37	.77	.13
<b>MCR-5</b>	125V	125V	50A	300A	1.82	1.34	2.53	1.51	.11
<b>MCR-7</b>	60V	90V	50A	300A	1.48	.49	2.02	.58	.10
<b>MCR-10</b>	60V	90V	50A	300A	3.62	1.16	4.41	1.38	.08

1. Interrupting ratings were measured at 100% (1/16 to 5) and 100% (7, 10) power factors on AC, and a time constant less than 1 ms. on DC.

2. I<sup>2</sup>t was measured at 50 amps 125 VAC, .95PF, (random closing angle) and 300 amps 125 VDC, TC <1ms. for the 1/16 through 5 amps and 50 amps 60 VAC, .95PF, (random closing angle), and 300 amps 90 VDC, TC <1ms. for the 7 and 10 amp fuses.

NOTE: All values shown above are typical.

- Device designed to carry rated current for four hours minimum. An operating current of 80% or less of rated current is recommended, with further derating required at elevated ambient temperatures.

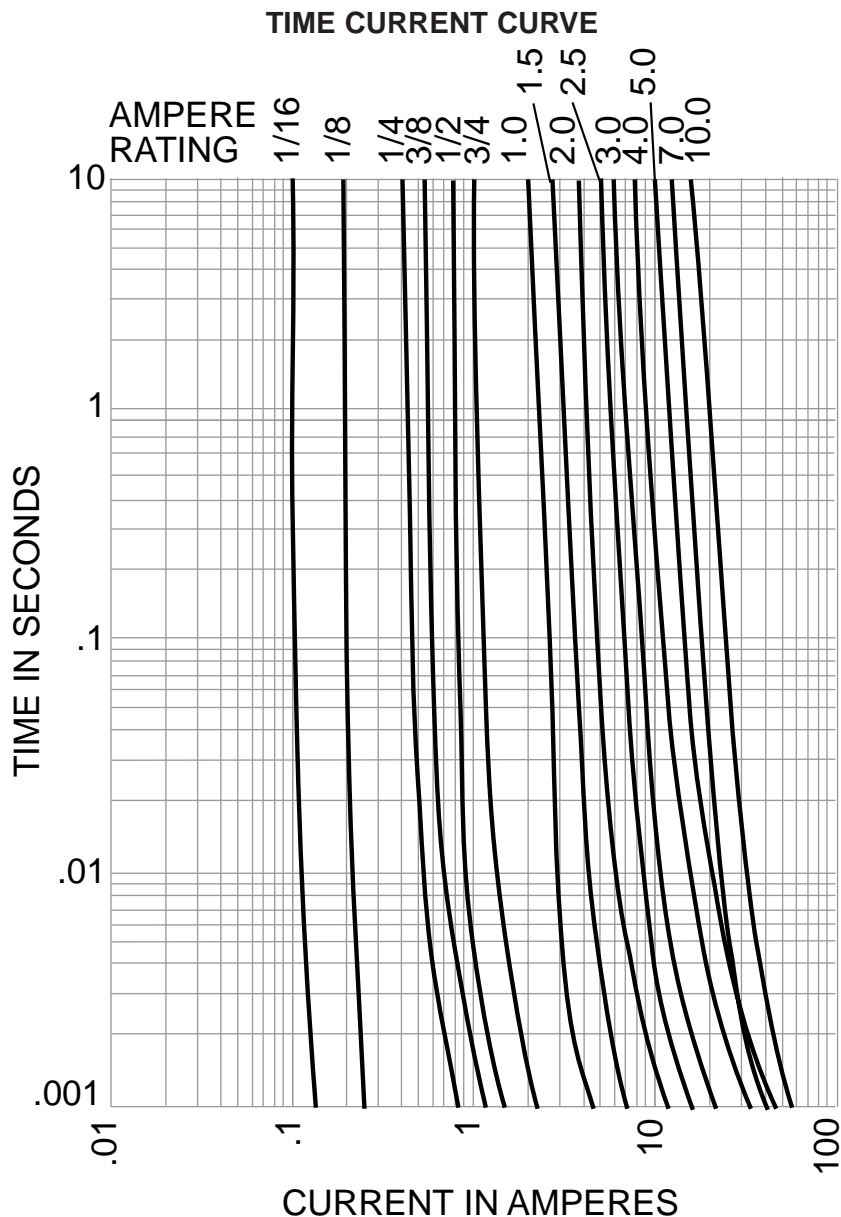

<b>PACKAGING CODE</b>	
Packaging Code	Description
Blank	10 units
BK	500 units
TR	2,500 pieces on tape and reel per EIA-296, 52.4mm spacing